

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



TECHNICAL DATASHEET

INDUSTRIES AND APPLICATIONS



ISOTEX RI DUO

Typical uses


- Automotive industry
- E-mobility / hybrid
- Cable manufacture
- Line protection

Key properties

- Long-term heat resistance of -40°C to +350°C
- Short-term heat resistance up to +450°C
- Very good protection against marten bite
- Good resistance to water, salt spray, cleaning agents, transformer oil, impregnating resins as well as to fuels and lubricants during temporary exposure
- Good abrasion resistance
- High buckling and bending strength, flexible, good cut resistance
- Thick-walled, thermally insulated
- Available in dyed version
- Nominal diameter 0,5 mm to 30 mm



Application temperature

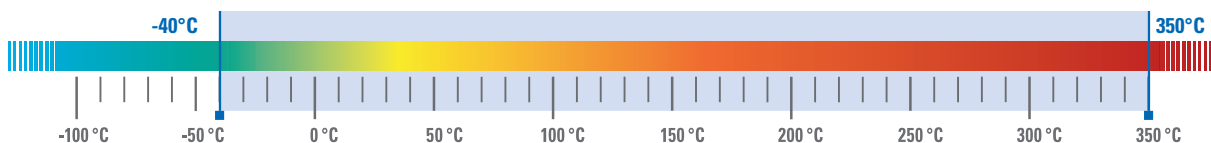

Product description

ISOTEX RI DUO consists of high thermally resistant textile glass fibres (e-glass) with a silicone resin impregnation. The combination of these materials allows the use of the protective sleeve in the automotive sector under high thermal stress. Even on extrem situations the sleeve resists a thermal load up to 450°C. The protective function still works largely after a partial thermal overstress because of the excellent thermal properties of the textile glass sleeve. ISOTEX RI DUO is also characterized by good resistance against short-term contact with fuels and lubricants. Water and salt spray does not affect the function of the sleeve. ISOTEX RI DUO is suitable for longer cable sets because of its good buckling resistance and it can be dyed in a wide range of colours. The ISOTEX RI DUO is designed as protection sleeve, without a defined dielectric strength. Because of the thick walls ISOTEX RI DUO has thermally insulating effects.

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



When it comes to competence

INDUSTRIES AND APPLICATIONS



ISOTEX RI DUO

Application properties

Property	Standard	Test requirements	Result
Flame resistance	FMVSS 302	Flame height 38 mm Flame exposure 15 s	Self-extinguishing

Mechanical / physical properties

Property	Standard	Test requirements	Result
Abrasion resistance	LV 312-3	Test at room temperature	Classification A

Compatibilities

Medium	Standard	Test requirements	Result
Automatic transmission oil	Based on DIN EN 60684 LV 312-3 customer specifications	Storage time 24h at room temperature Chemical externally spread	Requirements achieved
Biodiesel	Based on DIN EN 60684 LV 312-3 customer specifications	Storage time 24h at room temperature Chemical externally spread	Requirements achieved
Break fluid	Based on DIN EN 60684 LV 312-3 customer specifications	Storage time 24h at room temperature Chemical externally spread	Requirements achieved
Multigrade engine oil	Based on DIN EN 60684 LV 312-3 customer specifications	Storage time 24h at room temperature Chemical externally spread	Requirements achieved
Grease	Based on DIN EN 60684 LV 312-3 customer specifications	Storage time 24h at room temperature Chemical externally spread	Requirements achieved
Water-Glycol-mixture	Based on DIN EN 60684 LV 312-3 customer specifications	Storage time 24h at room temperature Chemical externally spread	Requirements achieved

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



TECHNICAL DATASHEET

INDUSTRIES AND APPLICATIONS



ISOTEX RI DUO

Ecology, Environment & Safety

Ingredients compliant with VDA requirements

IMDS listed

RoHS, GADSL compliant

Non-asbestos, textile glass fibres non-carcinogenic, non-hazardous to the environment, non-hazardous to water

The textile glass sleeve requires compliance with the industrial hygiene. Workplace ventilation has to be turned away from the worker, sensitive individuals may get slight skin irritation.

When using and disposing the ISOTEX RI DUO protective sleeve there are no environmentally relevant by-products expected.

BIW-Standard dimensions

ISOTEX RI DUO (Code: GSE)

On demand individual colours and dimensions available at any time

ID [mm]	Tol. ID [mm]	Wd [mm]	Tol. Wd [mm]	Ring [m]
5.0	±0.30	0.6	±0.30	100
6.0	±0.30	0.8	±0.30	100
7.0	±0.30	0.8	±0.30	100
8.0	±0.30	0.8	±0.30	100
9.0	±0.30	0.8	±0.30	100
10.0	±0.50	1.0	±0.40	100
11.0	±0.50	1.0	±0.40	50
12.0	±0.50	1.0	±0.40	50
13.0	±0.50	1.0	±0.40	50
14.0	±0.50	1.0	±0.40	50
15.0	±0.50	1.2	±0.40	50
16.0	±0.70	1.2	±0.40	50
17.0	±0.70	1.2	±0.40	50
18.0	±0.70	1.2	±0.40	50
19.0	±0.70	1.2	±0.40	50
20.0	±0.70	1.5	±0.40	25
21.0	±0.80	1.5	±0.40	25
22.0	±0.80	1.5	±0.40	25
23.0	±0.80	1.5	±0.40	25

(Continued on the next page)

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



TECHNICAL DATASHEET

INDUSTRIES AND APPLICATIONS



ISOTEX RI DUO

BIW-Standard dimensions

ISOTEX RI DUO (Code: GSE)

On demand individual colours and dimensions available at any time

ID [mm]	Tol. ID [mm]	Wd [mm]	Tol. Wd [mm]	Ring [m]
24.0	±0.80	1.5	±0.40	25
25.0	±0.80	3.20	±0.60	25