

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)

INDUSTRIES AND APPLICATIONS



ARA - TEX DUO L

Typical uses


- Automotive industry
- Crash protection
- E-mobility / hybrid
- Cable manufacture
- Line protection
- Commercial vehicles

Key properties

- Long-term heat resistance of -40°C to +210°C
- Short-term heat resistance up to +235°C
- Institute-tested against marten bite
- Abrasion class E, standard LV 312-3
- Good resistance to fuels and lubricants, water, salt spray and cleaning agents during temporary exposure
- High impact protection
- High cut resistance and good flexibility
- High bending and tensile strength
- Double-walled, thermally insulated
- Physiologically harmless
- Colour: orange, black
- Nominal diameter 10.0 mm to 24.0 mm



Application temperature

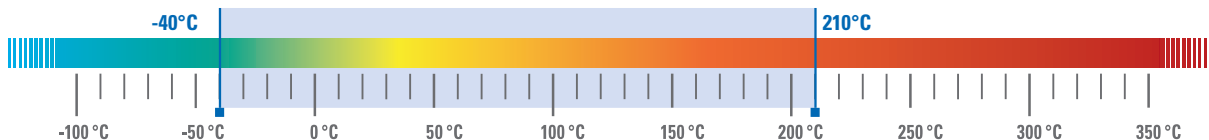

Product description

ARA - TEX DUO L is a double-walled protective sleeve. ARA – TEX DUO L is suitable for bundling cables as well as mechanical and thermal protection especially for e-mobility. The basic sleeve gets covered by a special process with a thermally and mechanically highly resistant aramid fiber. On extreme situations a thermal load capacity is possible up to 235°C. Perhaps the colour (orange) will change at temperatures above 210°C. The fixation is a high temperature resistant silicone. ARA – TEX DUO L is characterized by excellent resistance to fuels and lubricants. Due to its good stability and buckling resistance it is most convenient for long cable sets.

Its combination of aramide with its outstanding mechanical properties and textile glass with very good thermal properties produces an ideal combination for a protection sleeve and also considering the cost aspect.

BIW Isolierstoffe GmbH

Pregelstraße 2-5
 D-58256 Ennepetal
 Tel.: +49 (2333) 8308-0
 Fax.: +49 (2333) 8308-10
 info@biw.de
 www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



TECHNICAL DATASHEET

INDUSTRIES AND APPLICATIONS



ARA - TEX DUO L

Application properties

Property	Standard	Test requirements	Result
Flame resistance	FMVSS 302 LV 312-3	Flame height 38 mm Flame exposure 15s	Self-extinguishing

Ageing

Property	Standard	Test requirements	Result
Short-term ageing 240h / 235°C	LV 312-3	Winding test	Requirement achieved

Mechanical / physical properties

Property	Standard	Test requirements	Result
Abrasion resistance	LV 312-3	Test at room temperature	Classification E

Ecology, Environment & Safety

Ingredients compliant with VDA - requirements

IMDS listed

RoHS, GADSL compliant

Non-asbestos, textile fibers non-carcinogenic, non hazardous to the environment, not hazardous to water

In use and disposal of the ARA – TEX DUO L protective sleeve there are no environmentally relevant co-products expected

BIW-Standard dimensions

ARA - TEX DUO L (Code: AT2)

On demand individual colours and dimensions available at any time

ID [mm]	Tol. ID [mm]	Wd [mm]	Tol. Wd [mm]	Ring [m]
10.0	±0.50	1.30	±0.30	50
11.0	±0.50	1.30	±0.30	50
12.0	±0.50	1.30	±0.30	50
13.0	±0.50	1.30	±0.30	50
14.0	±0.50	1.30	±0.30	25
15.0	±0.50	1.30	±0.30	25
16.0	±0.50	1.30	±0.30	25
17.0	±0.50	1.30	±0.30	25
18.0	±0.50	1.30	±0.30	25
19.0	±0.50	1.30	±0.30	25
20.0	±0.50	1.30	±0.30	25
21.0	±0.50	1.30	±0.30	25

(Continued on the next page)

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



TECHNICAL DATASHEET

INDUSTRIES AND APPLICATIONS



ARA - TEX DUO L

BIW-Standard dimensions

ARA - TEX DUO L (Code: AT2)

On demand individual colours and dimensions available at any time

ID [mm]	Tol. ID [mm]	Wd [mm]	Tol. Wd [mm]	Ring [m]
22.0	±0.50	1.30	±0.30	25
23.0	±0.50	1.30	±0.30	25
24.0	±0.50	1.30	±0.30	25