

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001

## INDUSTRIES AND APPLICATIONS



## ISOFLEX F

### Typical uses


- Automotive industry
- E-mobility / hybrid
- Cable manufacture
- Line protection

### Key properties

- Long-term heat resistance of -40°C to +180°C
- Short-term heat resistance up to +205°C
- Horizontal self-extinguishing
- High mechanical (impact)-protection
- Acoustic insulation (clatter protection), excellent heat insulation
- Good flexibility and stretchability
- Resistant to UV- and gamma-radiation
- Good resistance to water, water-glycol mixture, salt spray, as well as to fuels and lubricants during temporary exposure
- Physiologically harmless
- Colours: red brown, black
- Nominal diameter 4.0 mm to 30.0 mm



### Application temperature

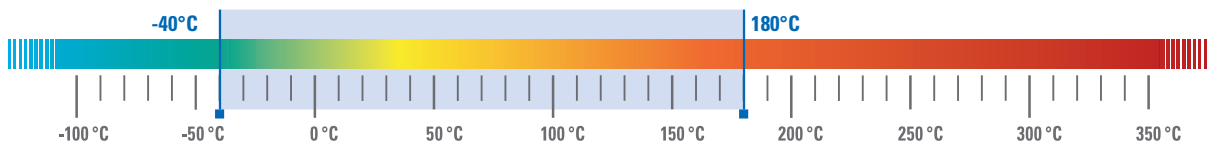

### Product description

ISOFLEX F protective sleeve is a combination of a textile glass fabric and a silicone foam coating. The silicone foam ensures with a wall thicknesses of up to 5.0 mm a very good thermal insulation and excellent mechanical protection against impact. The foam structure also leads to significant acoustic insulation (clatter protection). The resistance is very good to high temperatures and aggressive media. The efficient knitting method in connection with the special silicone foam coating reaches a high quality level. ISOFLEX F is available in a special design with a vertical self-extinguishing setting according to UL 1441 VW-1.

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001

INDUSTRIES AND APPLICATIONS



**ISOFLEX F**

**Application properties**

| Property         | Standard              | Test requirements                        | Result             |
|------------------|-----------------------|--|--------------------|
| Flame resistance | LV 312-3<br>FMVSS 302 | Flame height 38 mm<br>Flame exposure 15s | Self-extinguishing |

**Mechanical / physical properties**

| Property            | Standard | Test requirements        | Result           |
|---------------------|----------|--------------------------|------------------|
| Abrasion resistance | LV 312-3 | Test at room temperature | Classification A |

**Ecology, Environment & Safety**

Ingredients compliant with VDA requirements

IMDS listed

RoHS, GADSL compliant

Non-asbestos, textileglass fibres non-carcinogenic, non hazardous to the environment, not hazardous to water

When using and disposing of the ISOFLEX F protective sleeve there are no environmentally relevant by-products expected.

**BIW-Standard dimensions**

**ISOFLEX F (Code: GSF)**

On demand individual dimensions available at any time

| ID [mm] | Tol. ID [mm] | Wd [mm] | Tol. Wd [mm] | Ring [m] |
|---------|--------------|---------|--------------|----------|
| 4.0     | +0.5         | 1.0     | ±0.5         | 100      |
| 5.0     | +0.5         | 3.0     | ±0.5         | 100      |
| 6.0     | +0.5         | 3.0     | ±0.5         | 100      |
| 7.0     | +0.5         | 3.0     | ±0.5         | 100      |
| 8.0     | +0.8         | 3.0     | ±0.5         | 100      |
| 9.0     | +0.8         | 3.0     | ±0.5         | 100      |
| 10.0    | +0.8         | 3.0     | ±0.5         | 100      |
| 11.0    | +0.8         | 3.0     | ±0.7         | 50       |
| 12.0    | +0.8         | 3.0     | ±0.7         | 50       |
| 13.0    | +0.8         | 3.0     | ±0.7         | 50       |
| 14.0    | +0.8         | 3.0     | ±0.7         | 50       |
| 15.0    | +1.0         | 3.0     | ±0.7         | 50       |
| 16.0    | +1.0         | 3.0     | ±0.7         | 50       |
| 17.0    | +1.0         | 3.0     | ±0.7         | 50       |

(Continued on the next page)

**BIW Isolierstoffe GmbH**

Pregelstraße 2-5  
 D-58256 Ennepetal  
 Tel.: +49 (2333) 8308-0  
 Fax.: +49 (2333) 8308-10  
 info@biw.de  
 www.biw.de

**Certified management system by:**

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001



*When it comes  
to competence*

TECHNICAL DATASHEET

## INDUSTRIES AND APPLICATIONS

**ISOFLEX F****BIW-Standard dimensions****ISOFLEX F (Code: GSF)**

On demand individual dimensions available at any time

| ID [mm] | Tol. ID [mm] | Wd [mm] | Tol. Wd [mm] | Ring [m] |
|---------|--------------|---------|--------------|----------|
| 18.0    | +1.0         | 3.0     | ±0.7         | 50       |
| 19.0    | +1.0         | 3.0     | ±0.7         | 50       |
| 20.0    | +1.5         | 3.0     | ±0.7         | 50       |
| 21.0    | +1.5         | 3.0     | ±0.7         | 25       |
| 22.0    | +1.5         | 3.0     | ±0.7         | 25       |
| 23.0    | +1.5         | 3.0     | ±0.7         | 25       |
| 24.0    | +1.5         | 3.0     | ±0.7         | 25       |
| 25.0    | +1.5         | 3.0     | ±0.8         | 25       |
| 26.0    | +1.5         | 3.0     | ±0.8         | 25       |
| 27.0    | +1.5         | 3.0     | ±0.8         | 25       |
| 28.0    | +1.5         | 3.0     | ±0.8         | 25       |
| 29.0    | +1.5         | 3.0     | ±0.8         | 25       |
| 30.0    | +1.5         | 5.0     | ±0.8         | 25       |