

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



PRODUCT INFO

INDUSTRIES AND APPLICATIONS




Magnet Silicone

Key properties

- Peroxid vulcanised
- Temperature range -60 °C - 200 °C
- Resistant to UV and ozone (resistant to radiation and non-aging)
- Resistant to many chemicals
- Very good fire resistance
- No toxic combustion gases
- Free of plasticiser



Application temperature

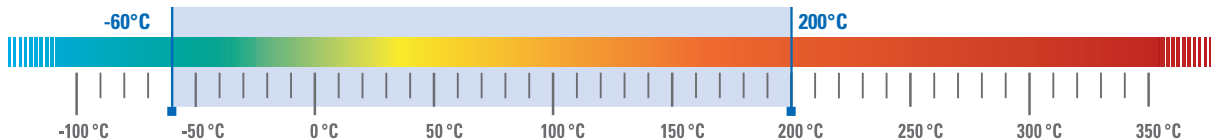

Product description

Silicone rubber for adhesion to magnetic material where silicone-typical properties are required.
Counterpart to profiles with integrated magnetic strip
Execution as hose, profile and moulded part
Magnetic properties limited adjustable

Material properties

Property	Standard	Result
Hardness [Shore A]		40 - 80 Shore
Density [g/cm ³]		ca. 2,4 g/cm ³

(Continued on the next page)

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



PRODUCT INFO

INDUSTRIES AND APPLICATIONS



Magnet Silicone

Material properties

Eigenschaft	Norm	Ergebnis
Colour		grey tones limited colouring