

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



PRODUCT INFO

INDUSTRIES AND APPLICATIONS




Silicone-special-adhesive-coating SK14

Key properties

- Adhesive on silicone basis
- Individual application according to customer requirements
- Application also possible on contoured surfaces
- Segmented application as required
- Repositionable without loss of adhesive strength
- Removable without residue
- Wide temperature range for use
- Can also be used above 200°C in special settings
- Also suitable for medical technology applications



Application temperature

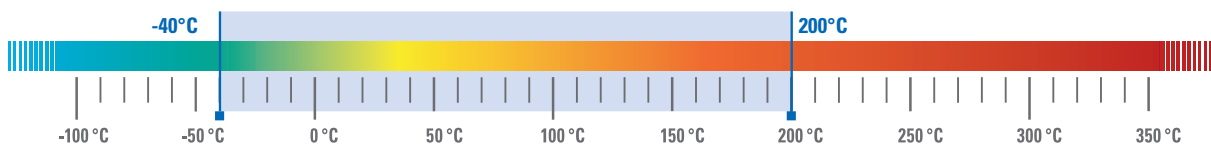

Product description

Self-adhesive equipment, strapless with silicone adhesive and a cover of different protective foils possible. The self-adhesive equipment serves as assembly aid. Surfaces must be clean, dry, free of grease and dust. Adheres well to glass surfaces (glass, glazed ceramics, enamelled surfaces, glazed porcelain, etc.)

Adhesive	Silicone
Carrier	without
Thickness mm	0.05 - 0.20
Covering	different protective foil

(Continued on the next page)

BIW Isolierstoffe GmbH

Pregelstraße 2-5
D-58256 Ennepetal
Tel.: +49 (2333) 8308-0
Fax.: +49 (2333) 8308-10
info@biw.de
www.biw.de

Certified management system by:

- IATF16949
- ISO9001
- ISO13485
- ISO14001
- ISO50001
- IIP (Investors in People)



PRODUCT INFO

INDUSTRIES AND APPLICATIONS



Silicone-special-adhesive-coating SK14

Adhesive	Silicone
Shelf Life 15°C-20°C. 65% rel.	2 month after production